

Placement

In ceilings and walls. The Ar11 is weather resistant, and can be placed in environmental extremes, including saunas and outdoors.

Maximum Output

95dB each, with 60 watts of amplification.

Soundfield Size

Up to 2,000 ft³

Close-Miked Near-Field Response (-3dB)

50-20,000 Hz

6dB Downpoint

45 Hz

Sensitivity [1 watt (2.83v) at 1m]

85dB

Nominal Impedance

8 ohms

Drive Unit

Full range 11 x 11" constrained layer diaphragm

Connections

Butt connectors

Construction

Injection molded plastic frame, patented constrained layer diaphragm, aeronautic adhesives

Weight


1 lb each

Ar11 Bracket (optional)

White powder-coated steel bracket 'holds the space' during construction.

Muffler (optional)

Fire-rated flexible backbox attaches to Ar11 Bracket, reduces sound transmission 9dB in adjoining rooms.

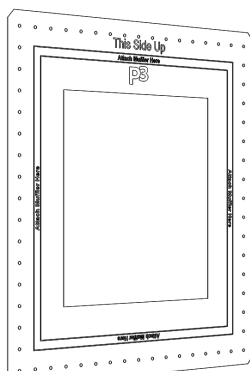

Speaker Cutout:
10-1/4 x 10-1/4"

Overall Dimensions:
17-1/2 x 17-1/2"